

F6122

Dual-beam Rx Active Beamforming IC 17.7GHz – 21.2GHz

The F6122 is a 16-channel dual-beam receive active beamforming RFIC designed for application in K/Ka-Band SATCOM planar phased array antennas. The IC has eight RF input ports, two RF output ports and 16 (8 per beam) phase/amplitude control channels. The eight input ports of the IC may be driven by eight single-polarized elements or four dual-polarized elements of an electronically scanned array (ESA). Each channel has 6-bits of digital phase and gain control resolution spanning 360° and 28dB of dynamic range, enabling precise beam pattern and polarization control.

The IC operates from a single supply of 2.1V–2.5V. When paired with the Axiro F6922 LNA, it achieves a typical cascaded gain of 30dB, while minimizing the front end feed loss due to the flexibility of LNA physical placement near the antenna feeds. The chip includes SPI programmable power management features such as a low power standby mode, independent enable controls on every channel, lower power bias mode and a single-beam operation mode. The device SPI bus and control pins operate from standard 1.8V logic at speeds up to 50MHz. Advanced digital modes and large on-chip memory allow for < 100ns beam position switching times at the array level, greatly reducing dead time and latency.


Finally, the compact and CTE-matched FC-BGA organic package, with all single-ended 50Ω matched RF ports and 0.5mm pitch, greatly simplifies the physical integration of these devices onto large antenna panels.

Features

- 17.7GHz–21.2GHz operation
- Supports 4 dual-pol or 8 single-pol elements
- Two simultaneous and independent beam outputs
- 360° phase control with 6-bit resolution
- 28dB gain control with 0.45dB step size
- 2.3V nominal single supply input
- Standard 1.8V digital logic
- IDAC for external LNA biasing
- Temperature compensation
- Temperature sensor with digital readout
- Advanced digital modes with fast beam steering
- On-chip beam-state memory
- 3.8 × 4.6 × 0.9 mm, 63-pin FC-BGA

Applications

- Phased Array Antennas
- K/Ka-Band SATCOM Terminals
- Aerospace, Maritime and SOTM

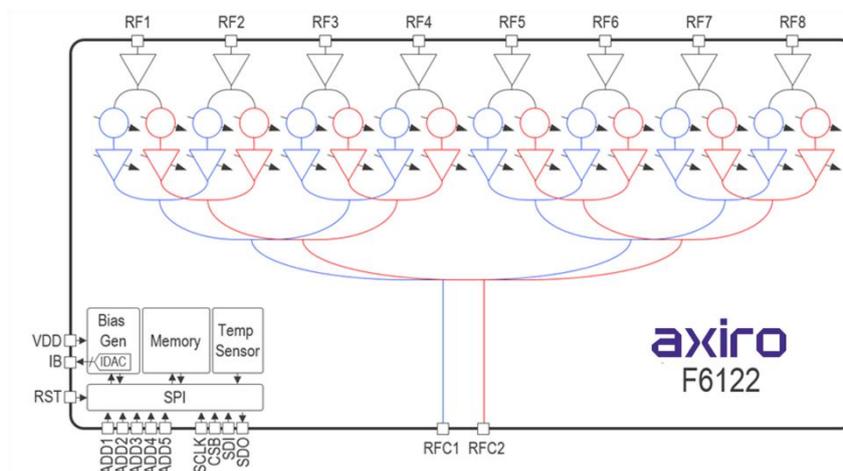

Ordering Information

Part Number	Package	MSL Rating	Carrier Type	Temp. Range
F6122SAVGI	3.8 × 4.6 × 0.9 mm 63-BGA	3	Tray	-40°C to +85°C
F6122SAVG18	3.8 × 4.6 × 0.9 mm 63-BGA	3	Reel	-40°C to +85°C
F6122SEVS	F6122 Evaluation System. Includes Digital Interface Board, RF Evaluation Board, USB Cable, Power Supply Cable, Digital Interconnect Cable, Evaluation Software, Device Drivers and RF De-embed Files.			

Revision History

Revision	Date	Description
2.00	Dec 29, 2025	Updated document branding and layout to Axiro Semiconductor standard. No changes to device functionality or specifications.